


Female Port Adapter

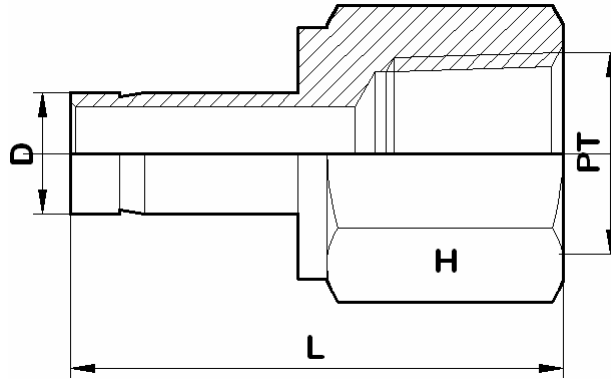


For Fractional Tubes

Apurva Code	D (in)	PT (NPT)	H (in)	L
2 A-FPA 2 N	1/8	1/8	9/16	31.5
2 A-FPA 4 N	1/8	1/4	3/4	35.5
3 A-FPA 2 N	3/16	1/8	9/16	32
3 A-FPA 4 N	3/16	1/4	3/4	36
4 A-FPA 2 N	1/4	1/8	9/16	33
4 A-FPA 4 N	1/4	1/4	3/4	37.2
4 A-FPA 6 N	1/4	3/8	7/8	39.5
4 A-FPA 8 N	1/4	1/2	1-1/16	42.5
5 A-FPA 2 N	5/16	1/8	9/16	34.3
5 A-FPA 4 N	5/16	1/4	3/4	37.6
6 A-FPA 2 N	3/8	1/8	9/16	34.3
6 A-FPA 4 N	3/8	1/4	3/4	38
6 A-FPA 6 N	3/8	3/8	7/8	40.4
6 A-FPA 8 N	3/8	1/2	1-1/16	46.8
8 A-FPA 4 N	1/2	1/4	3/4	43.5
8 A-FPA 6 N	1/2	3/8	7/8	46.5
8 A-FPA 8 N	1/2	1/2	1-1/16	51.8
10 A-FPA 6 N	5/8	3/8	7/8	48.4
10 A-FPA 8 N	5/8	1/2	1-1/16	53.9
10 A-FPA 12 N	5/8	3/4	1-1/4	55.4
12 A-FPA 8 N	3/4	1/2	1-1/16	53
12 A-FPA 12 N	3/4	3/4	1-1/4	55
12 A-FPA 16 N	3/4	1	1-5/8	58.5
14 A-FPA 12 N	7/8	3/4	1-1/4	57.2
16 A-FPA 12 N	1	3/4	1-1/4	60.7
16 A-FPA 16 N	1	1	1-5/8	64.4

* Dimensions are in mm, unless otherwise specified. Dimensions for reference only and are subject change.

Female Port Adapter

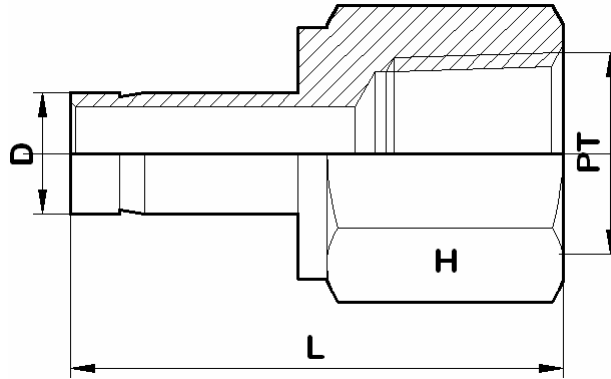

For Metric Tubes

Apurva Code	D (in)	PT (NPT)	H (in)	L
3M A-FPA 2 N	3	1/8	14	31.2
6M A-FPA 2 N	6	1/8	14	32.5
6M A-FPA 4 N	6	1/4	19	37.2
8M A-FPA 4 N	8	1/4	19	37.6
10M A-FPA 4 N	10	1/4	19	38.2
10M A-FPA 6 N	10	3/8	22	40.2
10M A-FPA 8 N	10	1/2	27	46.5
12M A-FPA 4 N	12	1/4	19	43.8
12M A-FPA 6 N	12	3/8	22	46
12M A-FPA 8 N	12	1/2	27	52.4
18M A-FPA 12 N	18	3/4	32	54.8